

SC311m

- Release Date **May 2022**
- Article No. **201016**
- EAN No. **4260393851016**
- Customs Tariff No. **85 198 100**
- Product URL **<https://www.trivum.de/sc311m>**



SC311m - EN



Amplifier

- 2x30 watts sinus at 8 ohms
- Class D amplifier (digital)
- Impedance of the connected loudspeakers at least 4 ohms

Power supply

- 100V-240V AC (max. 60 watts)

Housing

- Idle power consumption (without active zone): 5 watts
- Black lacquered sheet steel
- Dimensions: 218 mm x 41 mm x 127 mm (WxHxD)
- With packaging: 300 mm x 65 mm x 200 mm (WxHxD)
- Weight (net): 1,31 kg

Connections

- 1x Network (RJ45 socket)
- 1x USB (for service)
- 1x Speaker stereo (2x 2-pin terminal block)
- 1x Line output stereo (1x 3.5mm jack)
- 1x Line input stereo (1x 3.5mm jack)
- 1x Digital input (TOSLink socket)
- 2x Trigger input/output (3-pin terminal block)
- 1x DAB+/FM antenna (F socket)
- 1x WLAN/Bluetooth antenna (SMA socket)
- 1x USB-C trivum AudioBus Input (SDAT/MDAT)
- 1x USB-C trivum AudioBus Output (MDAT)
- 1x Power (IEC 60320 C5)

Front

- 4x Buttons: Power, Volume -/+, NextSource
- Status LED


Network

- LAN (RJ45 Ethernet)
- WLAN (Wifi)

Scope of delivery

- 1x SC311m
- 1x Bluetooth/WLAN antenna
- 1x Adapter for radio antenna (F connector)
- 1x Power cord
- 1 x Plug-in connection terminal for trigger
- 1 x Plug-In connection terminal for speakers
- 1x Quick Installation Guide

The specifications mentioned here are subject to change without notice.

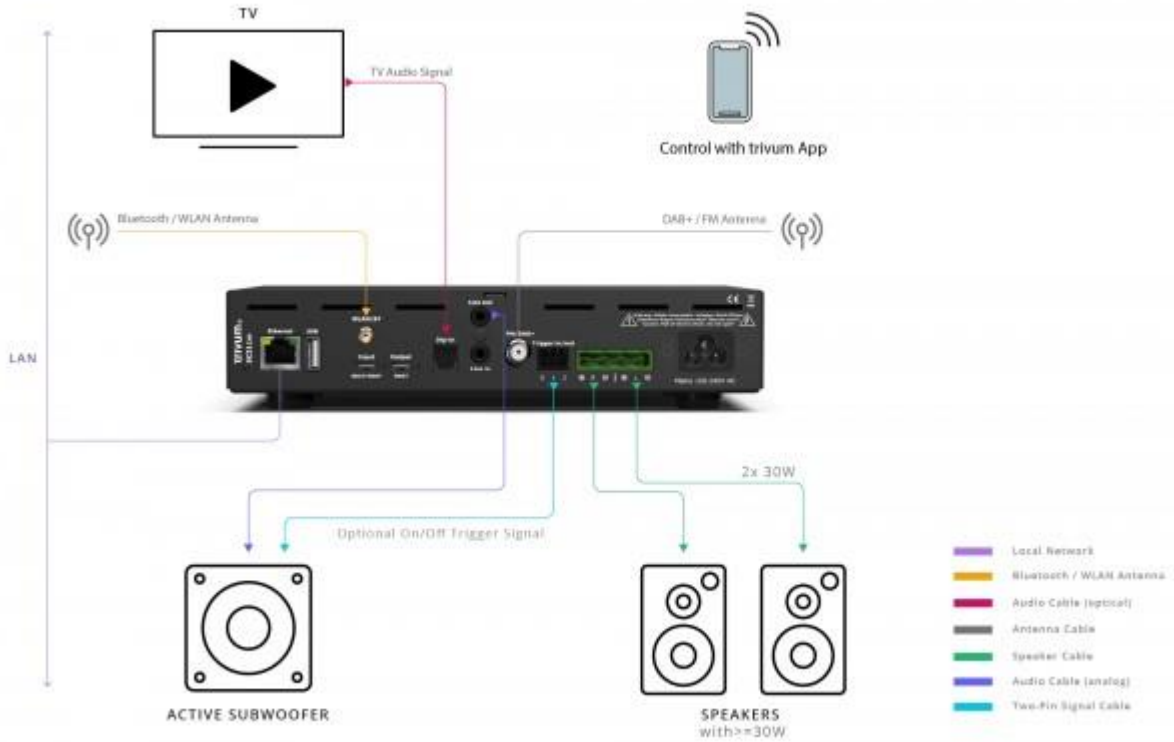

SC311m rack brackets for mounting in a 19" rack

